

JC010T2

USB GPRS/ GSM adapter



JC010T2 is a media converter that transmits signals between Ethernet 10Base-T UTP medium to 10 Base-2 BNC medium. Collision data are transmitted to ensure 100% collision detection in the combination of network segments or devices. JC010T2 is an ideal solution that provides connection from 10Base-T concentrator. It provides a plug-and-play solution at very low cost.

We also provides a family of wired and wireless LAN products that deliver the same level of security, scalability, and manageability for WLANs that customers have come to expect in their wired LAN, including Routers, Switches, Modems, and Network Adapters.


Key Features

- Supports 10Base-T and 10Base-2
- Standalone or composite application

Specifications

Model	JC010T2
Standards	<ul style="list-style-type: none"> • IEEE802.3 10Base-T • IEEE802.3 10Base-2
LAN Ports	<ul style="list-style-type: none"> • One UTP RJ-45 Connector • One BNC Connector
Network Protocols	<ul style="list-style-type: none"> • UTP Cable: Up to 100M • Coaxial Cable: Up to 185m per segment
LED Indicators	<ul style="list-style-type: none"> • BNC,TP: ACT • COL • PWR
Power Adapter	<ul style="list-style-type: none"> • External DC5V, 1A
Environment	<ul style="list-style-type: none"> • Operating Temperature: -20° ~ 70° C (-4° ~ 158° F) • Storage Temperature: -40° ~80° C (-40° ~ 176° F) • Humidity: 10% ~ 90% Non-condensing
Certifications	<ul style="list-style-type: none"> • CE , FCC
Dimensions	<ul style="list-style-type: none"> • 94 x 70.3 x 26.2 mm (3.7 x 2.77 x 1.03 inches)

Application

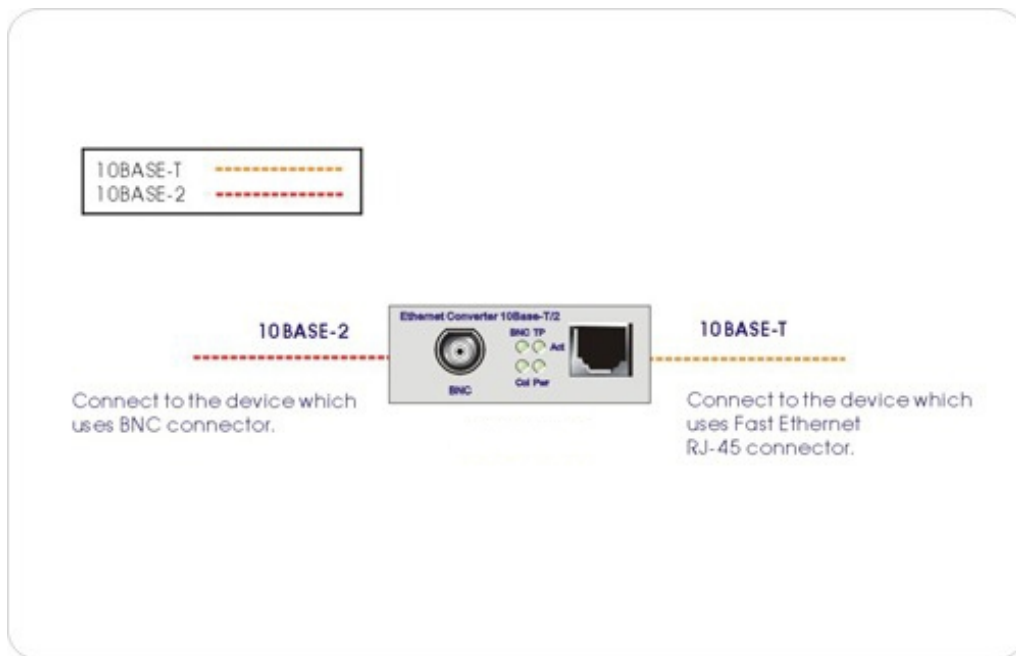

Ordering information

MODEL	DESCRIPTION
JC010T2	10Base-T to 10Base-2 Media Converter